


Smart, simple, unique

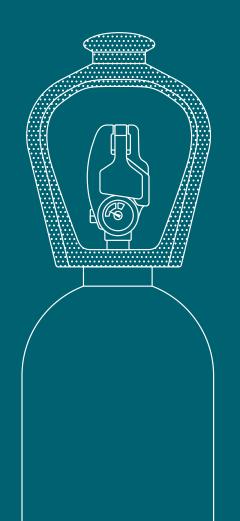

Simplify your gas cylinder use with SMARTOP™

Save time

- Quickly start and stop gas with on/off levers
- Easy handling thanks to ergonomic cap

Save gas

- Eliminate gas loss with on/off levers
- Check content at a glance with permanent pressure gauge

Work safely

- Emergency cut-off
- Protected valve

Protect gas quality

- RPV eliminates backflow contamination
- NRV protects quality during fill and prevents tempering



SMARTOP™ Simple, clever valve



On/off levers

- Easy opening
- Immediate gas cut-off
- On/off status at a glance
- Lever 1 (orange) for low-flow and low-pressure purge
- Lever 2 (red) for full opening



Permanent gauge

- At-a-glance content monitoring
- View cylinder content even when flow is stopped

RPV/NRV function

- Keep minimal pressure in the cylinder
- No back-flow contamination during use and storage



Ergonomic cap

- Easy handling of the cylinder
- Permanent, reliable protection for the valve

Instructions

Check the content gauge for cylinder pressure and ensure both levers are off



2 Back off the regulator pressure and connect the regulator to SMARTOP



3 Open lever 1 (orange) for partial flow and both levers for full flow



4 Set the outlet pressure or flow rate on your regulator



5 You are ready to go!

To view SMARTOP patent information, please visit Airgas.com/IP.

To see SMARTOP patent information, please visit Airgas.com/IP.

Contact us 800.909.8058 Airgas.com MCM-486 | ©2021 Airgas, Inc. Printed in the U.S.A.

