

Tough chemical protection unparalleled comfort



Nitrile +
Neoprene

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

Innovative 3 Layer Design*

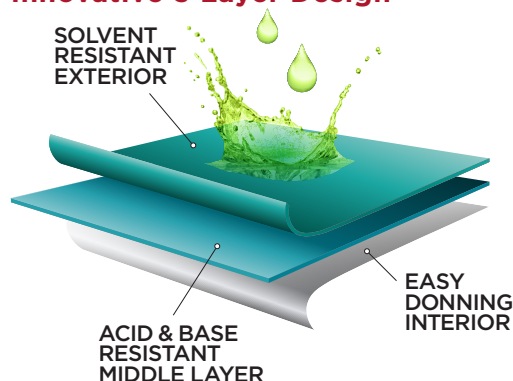

* The method used to produce this 3 layer design is patent pending.

TECHNICAL DATA SHEET:

PRODUCT INFORMATION:

	93-260
Material	Nitrile + Neoprene
Color	Green exterior, blue interior
Glove Design	Ambidextrous, Powder-Free, Textured fingers, Heavy Duty Product
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory/Standards Compliance	COMPLIANT WITH ASTM D3577, TYPE II, PPE 89/686, EN 420, 388 & 374 CATEGORY III
Packaging	50 gloves per dispenser box, 10 dispenser boxes in a shipper box
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Sri Lanka
User Needs Segment	High Risk Glove – Extended cuff gloves to provide additional protection for the wrist and forearm.

PHYSICAL PROPERTIES:

	TYPICAL VALUES						TESTING METHOD
	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL	ASTM D3767/EN 420
Length (mm/inches)	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	300 / 11.8	
Average Palm Width	78	89	98	111	116	122	
Freedom from Holes (Inspection level I)	0.65 AQL						ASTM D6319-10/ ASTM D5151-06 (2011)
Palm Thickness Single Wall	(mm : 0.198) / (mil : 7.8)						ASTM D3767/EN 420
	BEFORE AGING			AFTER AGING			
Ultimate Tensile Strength	22 Mpa			26 Mpa			ASTM D6319-10
Elongation at Break (%)	620			520			ASTM D6319-10
Force at break (N)	16			17			ASTM D6319-10

ORDERING INFORMATION:

	SIZE	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL
93-260	REORDER NO.	MCR93-260-XS	MCR93-260-S	MCR93-260-M	MCR93-260-L	MCR93-260-XL	MCR93-260-XXL

For additional information visit us at www.ansell.com, or call us at 1-877-750-6110

Ansell
111 Wood Avenue South
Suite 210
Iselin, NJ 08830
USA

Ansell
105 Lauder
Cowansville, QC J2K 2K8
Canada

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2016 Ansell Limited. All Rights Reserved.
Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application

Performance Standards



Regulatory Compliance

CE 0493 EAC
TP TC 019/2011